

SYT CHAIN


ISO 9001:2008



SHYE YA TRADING

O-ring Chain

O-ring chain is specially designed for applications that don't permit regular lubrication, requiring to depend entirely upon initial factory lubrication throughout its service life. The chain can provide up to ten times of the wear life to standard chain. O-ring chain is constructed with O-rings that seal a specially formulated lubricant into every joint. The sealed-in lubricant is essential for the chain's optimum wear life.

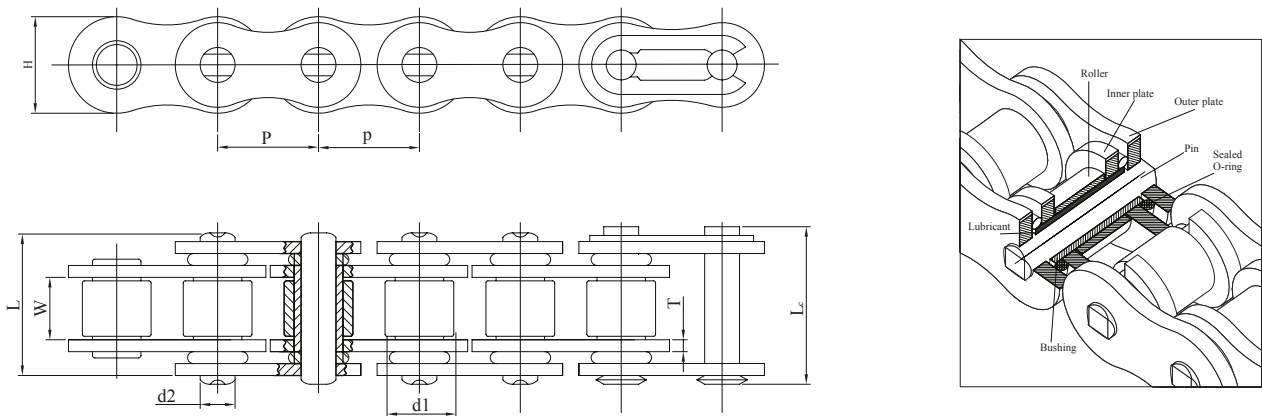


KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Minimum Tensile Strength	Average Tensile Strength	Allowed Load
	P	W min	d1 max	d2 max	L max	Lc max	H max	T	min		max
	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	kgf
40RO	12.70	7.85	7.92	3.98	19.80	21.80	12.0	1.50	1650	2000	280
50RO	15.875	9.40	10.16	5.09	23.50	25.70	15.0	2.0	2550	3000	440
60RO	19.05	12.57	11.91	5.94	28.80	31.50	17.80	2.35	3600	4200	620
80RO	25.40	15.75	15.88	7.94	40.10	43.0	23.40	3.20	5900	8500	990
08BRO	12.70	7.75	8.51	4.45	19.60	21.60	11.80	1.50	1820	1950	280



KCM

HKK

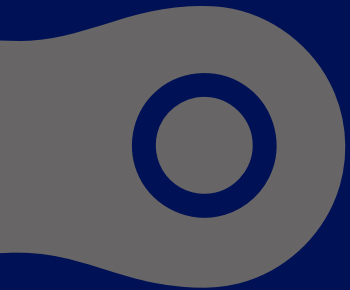

協亞
總代理

協亞貿易有限公司 SHYE YA TRADING www.sytchain.com
10483台北市中山區松江路313巷5號 sales@sytchain.com
TEL (02)2501-9566 FAX (02)2505-9866 LINE ID sytchain